


Mighty-Might Directional Counter Installation Instructions

Part # = 3005-61

THE MIGHTY-MIGHT DIRECTIONAL PEOPLECOUNTER PROJECTS AN INVISIBLE BEAM UP TO 10 FEET ACROSS THE AREA YOU WISH TO BE COUNTED. THE INWARD AND OUTGOING COUNTS CAN BE READ ON A TWO-LINE LCD DISPLAY, OR ON A COMPUTER WHEN USING THE OPTIONAL COMPUCOUNT.

CONTROLS AND FUNCTIONS

- (1) *SENSOR LENS* – MUST BE ALIGNED WITH THE REFLECTOR
- (2) *ALIGNMENT INDICATORS* – ON (RED) WHEN OUT OF ALIGNMENT, OFF WHEN IN ALIGNMENT
- (3) *MOUNTING HOLES* – ONE ON TOP, ONE ON BOTTOM, TO SECURE COUNTER TO SURFACE
- (4) *ULTRAFLEX REFLECTOR* – INSTALL USING THE TWO HOLES
- (5) *LCD DISPLAY* – TWO LINES FOR COUNTING INBOUND AND OUTGOING, RESET ANYTIME USING MAGNET

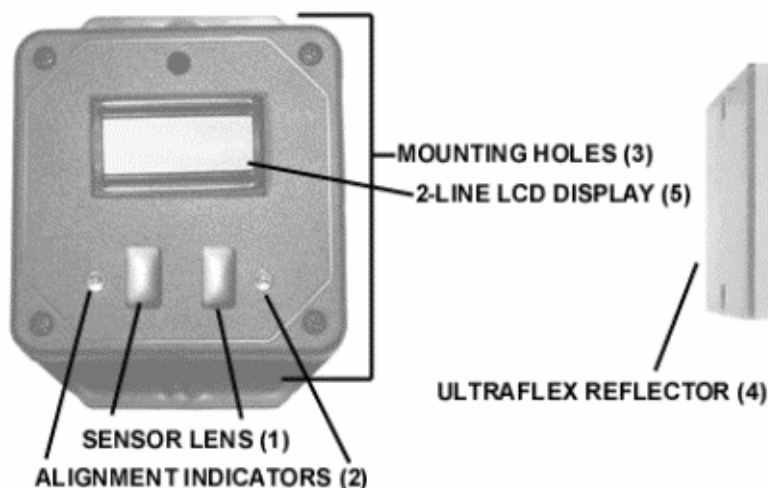

1. THE COUNTER SHOULD BE INSTALLED ONTO A SURFACE, USING THE TWO MOUNTING HOLES (3), WITH NO BEAMPATH OBSTRUCTIONS, APPROXIMATELY 35 INCHES HIGH FOR COUNTING BOTH ADULTS AND CHILDREN, AND 55 INCHES HIGH FOR COUNTING ADULTS ONLY.
2. PLUG POWER CORD INTO AN ELECTRICAL OUTLET.
3. MOVE REFLECTOR ON SURFACE OPPOSITE THE COUNTER UNTIL ALIGNMENT IS MAINTAINED (RED ALIGNMENT INDICATOR LIGHTS (2) GO OUT). INSTALL USING THE HOLES IN THE REFLECTOR.
4. TO RESET THE LCD DISPLAY TO ZERO, THE COUNTER MUST BE IN ALIGNMENT WITH NO BEAMPATH OBSTRUCTIONS. HOLD MAGNET AT TOP RIGHT CORNER OF THE MIGHTY-MIGHT COUNTER FOR FIVE SECONDS UNTIL THE DISPLAY (5) REGISTERS ZERO.

AVAILABLE ACCESSORIES: BOOSTACOUNT AND COMPUCOUNT